

ADHESIVES, SEALANTS & TAPE



Adhesive Backed Magnets

825



Adhesive Tape

820 - 821, 826 - 827



Hook & Loop

822 - 824



Liquid Adhesives

828 - 829




Thread Sealant

830 - 831





High Bond Tape

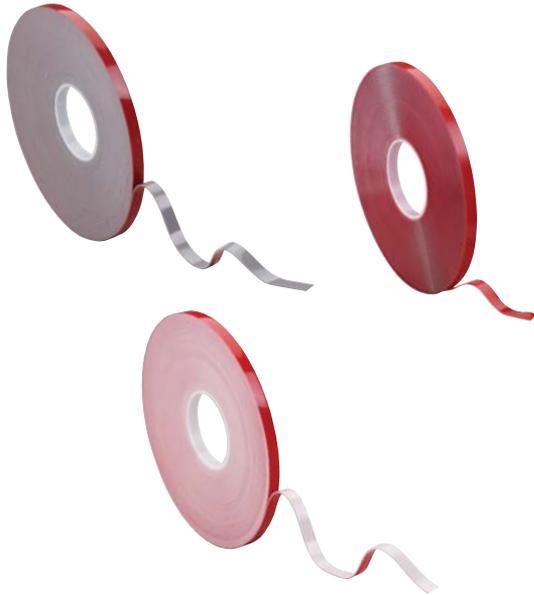

Specifications:

- Material: Closed Cell Blend of Neoprene Nitrile and PVC
- Service Temperature: -20°F to 200°F (-29°C to 93°C)
- High performance acrylic foam core tapes meet a wide application of needs

Features:

- Aesthetically pleasing – create nearly invisible bond lines without unsightly welds, rivets, and screws
- Tamper resistant – permanent bond
- Great for bonding dissimilar metals
- Excellent resistance to temperature cycles
- Unique shock absorption and vibration damping properties
- Good conformability and softness for irregular or curved surfaces
- To be used on appliances, in design, electronics, event promotion, HVAC, POP displays and sign manufacturing
- Excellent UV Protection

High Bond Substrate Guide

Substrate	Type			
	Clear 23	34	White 40	Grey 14
ABS	■	■	■	■
Aluminum	■	■	■	■
Glass	■	■	■	■
Flexible PVC	■	■	■	■
High Density PVC	■	■	■	■
Powder Coat	■	■	■	■
Rigid PVC	■	■	■	■
Styrene	■	■	■	■
Stainless Steel	■	■	■	■

Note: Substrate guide is representative only. Products must be tested in specific application before use.

Item No.	Type	Color	Thickness Inch	Width Inch	Roll Length Feet
472939	23	Clear	.020	1/2	216
472940	23	Clear	.020	3/4	216
472941	23	Clear	.020	1	216
472942	34	Clear	.040	1/2	108
472943	34	Clear	.040	3/4	108
472944	34	Clear	.040	1	108
472945	14	Grey	.045	1/2	108
472946	14	Grey	.045	3/4	108
472947	14	Grey	.045	1	108
472948	40	White	.045	1/2	108
472949	40	White	.045	3/4	108
472950	40	White	.045	1	108

Permanent Double Sided Foam Tape



Specifications:

- Material: Polyolefin Foam
- Service Temperature: -20°F to 150°F (-29°C to 66°C)
- Adhesive: Rubber-Based Adhesive

Features:

- The adhesive is an extremely aggressive tack with a high shear strength
- Excellent for hand or automatic application.
- Flexible for filling spaces and conformable for joining irregular surfaces
- Designed to bond to many types of surfaces including corrugated, chipboard, wood, plastics, metal, glass, and powder coated materials
- Ideal on POP displays
- Fair UV Protection

Standard Roll (3" Diameter Core)

Item No.	Color	Thickness Inch	Width Inch	Roll Length Feet
471339	White	1/32	1/2	216
471394	Black	1/32	1/2	216
471340	White	1/32	3/4	216
471395	Black	1/32	3/4	216
471341	White	1/32	1	216

Item No.	Color	Thickness Inch	Width Inch	Roll Length Feet
471399	Black	1/32	1	216
471342	White	1/16	1/2	216
471343	White	1/16	3/4	216
471344	White	1/16	1	216



**Foam Tape
Adhesive Both Sides
Kiss Cut Roll**



Specifications:

- Adhesive: Rubber-based permanent on both sides in stock (not recommended for direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: - 20°F to 150°F
- Holding Power: 1 lb per 1 sq. in. of tape

Applications:

- Temporary, semi-permanent and permanent displays
- Signage
- End caps
- Headers
- Textured surface bonding

Designed to bond many types of surfaces including corrugated, chipboard, wood, plastics, metal, glass, and powder coated materials.

Item No.	Thickness Inch	Piece Size		Color	Pieces Per Roll
		Width Inch	Length Inch		
470006	1/32	1	1	White	10000
470007	1/32	1	2	White	6300
470008	1/32	1	3	White	4000
470029	1/32	1	4	White	2500
470017	1/16	1	2	White	5000
470033	1/4	1	3	White	1000
470019	1/16	1	4	White	2500
470022	1/8	1	1	White	6500
470023	1/8	1	2	White	2700
470024	1/8	1	3	White	2000
470025	1/8	1	4	White	2000
470026	1/4	1	1	White	5000
470018	1/16	1	3	White	2500
470502	1/4	1	2	White	2300



GASKETING & SEALS

Pages 182 - 185





Hook and loop fasteners are used for easy and secure opening and closing. High tack adhesive for high and low surface energy substrates. They come on a clear polyester liner for easy release and the permanent adhesive is proven to work with many materials such as corrugated, chipboard, plastics, wood, metal and glass.

Specifications:

- Adhesive: Rubber-based permanent on one side
- Material: 100% nylon with clear polyester film liner
- Application temperature: 65°F to 100°F (18°C to 38°C)
- Service temperature: -20°F to 150°F (-29°C to 66°C)

Applications:

- Sample books
- POP displays
- Signage
- Book / folder closure
- Exhibits
- Enclosures
- Packaging

Hook and Loop Tape Adhesive One-Side Continuous Roll



Item No.	Width Inch	Roll Length Yards	Color	Type
476804	1/2	25	White	Hook Side
476816	1/2	25	White	Loop Side
476798	1/2	25	Black	Hook Side
476810	1/2	25	Black	Loop Side
476806	3/4	25	White	Hook Side
476818	3/4	25	White	Loop Side
476800	3/4	25	Black	Hook Side
476812	3/4	25	Black	Loop Side
476807	1	25	White	Hook Side
476819	1	25	White	Loop Side
476803	1	25	Black	Hook Side
476813	1	25	Black	Loop Side
476809	2	25	White	Hook Side
476812	2	25	White	Loop Side
476802	2	25	Black	Hook Side
476815	2	25	Black	Loop Side

Hook and Loop Tape Mated Set Adhesive One-Side Pre-Cut



Item No.	Width Inch	Length Inch	Color	Number of Sets
471613	1	1	White	5000
471614	1	2	White	2500
471615	1	3	White	2000
471616	1	4	White	1500
471617	1	5	White	1000
471633	1	1	Black	5000
471634	1	2	Black	2500
471635	1	3	Black	2000
471636	1	4	Black	1500
471637	1	5	Black	1000

Hook and Loop Coins Mated Set Adhesive One-Side Kiss Cut Roll



Hook and Loop Coins Adhesive One-Side Kiss Cut Roll




Item No.	Coin Dia. Inch	Color	Type	Coins Per Roll
476946	1/2	White	Hook Side	1,440
476954	1/2	White	Loop Side	1,440
476942	1/2	Black	Hook Side	1,440
476950	1/2	Black	Loop Side	1,440
476947	5/8	White	Hook Side	1,200
476955	5/8	White	Loop Side	1,200
476943	5/8	Black	Hook Side	1,200
476951	5/8	Black	Loop Side	1,200
476948	3/4	White	Hook Side	1,028
476956	3/4	White	Loop Side	1,028
476944	3/4	Black	Hook Side	1,028
476952	3/4	Black	Loop Side	1,028
476949	7/8	White	Hook Side	900
476957	7/8	White	Loop Side	900
476945	7/8	Black	Hook Side	900
476953	7/8	Black	Loop Side	900



Item No.	Coin Dia. Inch	Color	Sets Per Roll
476983	1/2	White	1,000
476985	3/4	White	1,000
476986	7/8	White	1,000
476991	1/2	Black	1,000
476993	3/4	Black	1,000
476994	7/8	Black	1,000

Hook & Loop Fasteners Velstick Velwashers and Velcoin Dots

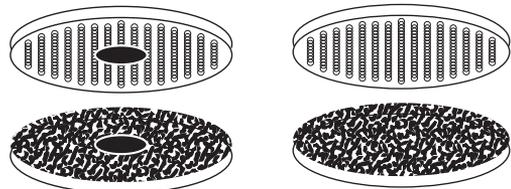

Washers have a 1/8" diameter center hole. They can be used with screws, nails, rivets or glue. Dots have medium tack, medium set-up, pressure sensitive adhesive. Achieves full bond strength in 24 hours. Sold as a set, one hook and one loop each. Withstands up to 5,000 openings and closings. Color black.

Item No.	Dot Dia. Inch	Pack Qty.	Item No.	Dot Dia. Inch	Pack Qty.
VEL-84	3/4	1	VEL-96	7/8	1
VEL-86	1 1/8	1	VEL-98	1 1/8	1



Hook & Loop Discs



Specifications:

- Material: 100% Nylon with Clear Polyester Film Liner
- Application Temperature: 65°F to 100°F (18°C to 38°C)
- Service Temperature: -20°F to 150°F (-29°C to 66°C)
- Adhesive: Rubber-Based Permanent on One Side

Features:

- The permanent adhesive will work with corrugated, chipboard, glass, most plastics, and metal
- Hook and loop come on a clear polyester liner for easy release
- Ideal for POP displays, sample books, signage, exhibits, enclosures and packaging

Item No.	Type	Color	Diameter In	Discs Per Roll
472459	Hook	White	1/2	1400
472467	Loop	White	1/2	1400
472455	Hook	Black	1/2	1400
472463	Loop	Black	1/2	1400
472461	Hook	White	3/4	1028
472469	Loop	White	3/4	1028

Item No.	Type	Color	Diameter In	Discs Per Roll
472457	Hook	Black	3/4	1028
472465	Loop	Black	3/4	1028
472462	Hook	White	7/8	900
472470	Loop	White	7/8	900
472458	Hook	Black	7/8	900
472466	Loop	Black	7/8	900

RKWRE

Economy Hook & Loop Roll




Specifications:

- Material: Hook: Low Density Polyethylene, Loop: Nylon Knit
- Color: Black

Features:

- This product features VELCRO® brand hook & loop material
- Similar in function and purpose to the RKWR series of rolls, these economy rolls are made from a lower-profile, economical material
- User can cut to desired length

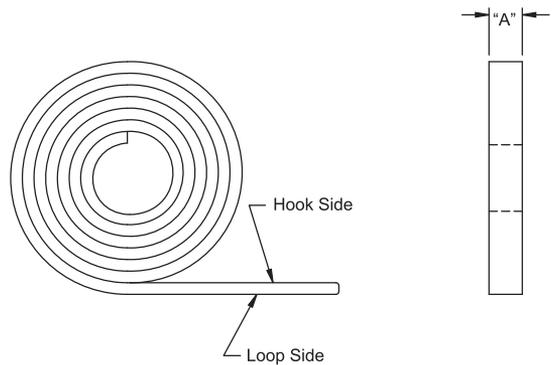

Item No.	"A" Thickness in (mm)	Roll Length Yards
RKWRE-3L-BK	.50 (12.7)	25
RKWRE-1L-BK	.75 (19.1)	25

FREE SAMPLES!

Call Or Go Online




What's better than FREE? If you're working on a project and you think an Essentra Components part would be a good fit – ask us for a sample.

We can't always provide a sample, but we have thousands that are available. They're in-stock and ready to ship today.



RKWR
Hook & Loop Roll

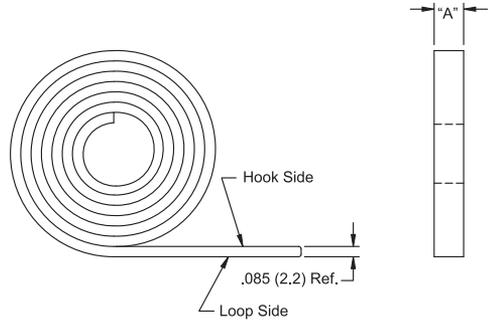

Specifications:


- Material: Hook: Low Density Polyethylene, Loop: Nylon Knit

Features:

- This product features VELCRO® brand hook & loop material
- User can cut to desired length
- Available in 2 lengths; 5 yards and 25 yards

Item No.									"A"	Roll Length Yards
Black	Blue	Green	Grey	Orange	Red	White	Yellow			
RKWR-3-BK	RKWR-3-BL	RKWR-3-GN	RKWR-3-GY	RKWR-3-OR	RKWR-3-RD	RKWR-3-W	RKWR-3-YL	.50 (12.7)	5	
RKWR-1-BK	RKWR-1-BL	RKWR-1-GN	RKWR-1-GY	RKWR-1-OR	RKWR-1-RD	RKWR-1-W	RKWR-1-YL	.75 (19.1)	5	
RKWR-2-BK	RKWR-2-BL	RKWR-2-GN	RKWR-2-GY	RKWR-2-OR	RKWR-2-RD	RKWR-2-W	RKWR-2-YL	1.0 (25.4)	5	
RKWR-3L-BK	RKWR-3L-BL	RKWR-3L-GN	RKWR-3L-GY	RKWR-3L-OR	RKWR-3L-RD	RKWR-3L-W	RKWR-3L-YL	.50 (12.7)	25	
RKWR-1L-BK	RKWR-1L-BL	RKWR-1L-GN	RKWR-1L-GY	RKWR-1L-OR	RKWR-1L-RD	RKWR-1L-W	RKWR-1L-YL	.75 (19.1)	25	
RKWR-2L-BK	RKWR-2L-BL	RKWR-2L-GN	RKWR-2L-GY	RKWR-2L-OR	RKWR-2L-RD	RKWR-2L-W	RKWR-2L-YL	1.0 (25.4)	25	

RKWRPR
Plenum Rated Hook & Loop Roll

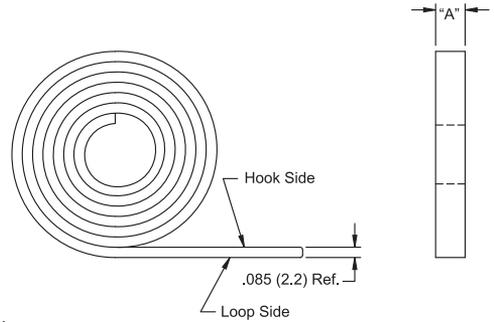

Features:


- This product features VELCRO® brand hook & loop material
- Meets UL94 V-2 requirements. UL E143339
- Accepted as a wire positioning device (16SA) in air handling spaces in accordance with section 300-22 paragraph (C) and (D) of the National Electrical Code
- User can cut to desired length

Specifications:

- Material: Hook: UL94 V-2 Black Polypropylene, Loop: UL94 V-2 Maroon Nylon
- Color: Maroon

Item No.	"A" Thickness in (mm)	Roll Length Yards
RKWRPR-3	.50 (12.7)	5
RKWRPR-1	.75 (19.1)	5
RKWRPR-2	1.0 (25.4)	5
RKWRPR-3L	.50 (12.7)	25
RKWRPR-1L	.75 (19.1)	25
RKWRPR-2L	1.0 (25.4)	25

RKS
Hook & Loop Strips

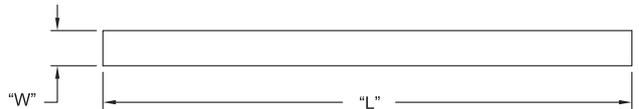

Features:

- This product features VELCRO® brand hook & loop material
- Heavy duty hook and loop
- User can cut to desired length
- Excellent in reusable applications

Specifications:

- Material: Hook: Low Density Polyethylene, Loop: Nylon Knit

Item No.		"L" Length in (mm)	"W" Width in (mm)	Pack Qty.
Black	White			
RKS-8-6-BK-C	-	6.0 (152.4)	1/2 (12.7)	100
RKS-8-6-BK	RKS-8-6-W	6.0 (152.4)	1/2 (12.7)	10
RKS-8-8-BK-C	-	8.0 (203.2)	1/2 (12.7)	100
RKS-8-8-BK	RKS-8-8-W	8.0 (203.2)	1/2 (12.7)	10
RKS-8-12-BK-C	-	12.0 (304.8)	1/2 (12.7)	100
RKS-8-12-BK	RKS-8-12-W	12.0 (304.8)	1/2 (12.7)	10
RKS-12-6-BK-C	-	6.0 (152.4)	3/4 (19.1)	100
RKS-12-6-BK	RKS-12-6-W	6.0 (152.4)	3/4 (19.1)	10
RKS-12-8-BK-C	-	8.0 (203.2)	3/4 (19.1)	100
RKS-12-8-BK	RKS-12-8-W	8.0 (203.2)	3/4 (19.1)	10
RKS-12-12-BK-C	-	12.0 (304.8)	3/4 (19.1)	100
RKS-12-12-BK	RKS-12-12-W	12.0 (304.8)	3/4 (19.1)	10
RKS-16-8-BK-C	-	8.0 (203.2)	1.0 (25.4)	100
RKS-16-8-BK	RKS-16-8-W	8.0 (203.2)	1.0 (25.4)	10
RKS-16-12-BK-C	-	12.0 (304.8)	1.0 (25.4)	100
RKS-16-12-BK	RKS-16-12-W	12.0 (304.8)	1.0 (25.4)	10

ADHESIVE BACKED MAGNETS



Flexible Magnetic Tape Adhesive One-Side Continuous Roll



Tapes are made from a flexible magnetic material and coated on one side with a rubber adhesive. Adhesive has a high initial tack.

Specifications:

- Application Temperature: Above 50°F
- Service Temperature: 0°F to 150°F

Application:

- Lightweight applications
- Graphics
- Pocket attachment
- Calendars



Item No.	Thickness Inch	Width Inch	Roll Length Feet
473118	0.030	1/2	100
473120	0.030	1	100
473122	0.030	2	100

Flexible Magnetic Material Magnetic Strips



Soft and flexible magnet material. Can be easily cut and drilled. EM-888 comes with two 5.9" strips per bag and has adhesive strips for attaching to non-metal surfaces.

Item No.	Length Inch	Width Inch	Thickness Inch	Pack Qty.
EM-880	6.6	3/8	3/64	1
EM-888	5.9	3/8	3/64	2

BUMPERS & STICK-ON FEET



Pages 243 - 244

Flexible Magnetic Tape Adhesive One-Side Kiss Cut Roll



Tapes are made from a flexible magnetic material and coated with a rubber adhesive. Adhesive has a high initial tack.

Specifications:

- Application Temperature: Above 50°F
- Service Temperature: 0°F to 150°F

Applications:

- **.030" thickness**
 - Lightweight applications
 - Graphics
 - Pocket attachment
 - Calendars
- **.060" thickness**
 - Lightweight plastics
 - Appliance signage
 - Banners
 - Nameplates
 - Advertising signs



Item No.	Thickness Inch	Width Inch	Length Inch	Pieces Per Roll
473142	0.030	1	3	400
473143	0.030	1	4	300
473144	0.030	1	5	240
473147	0.060	1	3	400
473148	0.060	1	4	300
473149	0.060	1	5	240

Flexible Magnetic Material Pre-Cut Sheets - White One Side



Item No.	Thickness Inch	Width Inch	Length Feet	Max Pull Lbs. Per Linear Ft.	Pack Qty.
IM-24	1/32	24 3/8	1	1.30	1
IM-25	1/32	24 3/8	10	1.30	1
IM-26	1/32	24 3/8	25	1.30	1

Flexible Magnetic Material 100 Foot Strips



Item No.	Thickness Inch	Width Inch	Pack Qty.	Item No.	Thickness Inch	Width Inch	Pack Qty.
Non-Adhesive Backed Strip				Adhesive Backed Strip			
IM-1	1/16	1/2	1	IM-7	1/16	1/2	1
IM-5	1/16	1	1	IM-9	1/16	3/4	1
				IM-11	1/16	1	1



Silicone Stretch Wrap



Conforms to irregular shapes to protect, insulate, secure and mask. 300% elongation. Eliminates secondary clean up you have after high temperature finishing systems. A real cost saver. Fuses to itself, forming an inseparable bond after 24 hours at room temperature. A great low cost seal in electrical insulation, splicing, wire wrap, etc. Won't crack or separate with thermal movement and resists shock and vibrations. A low cost replacement of heat shrinkable tubing/tape. Each roll is 1" x .020" x 36'. Red color.

Item No.	Description	Pack Qty.
MTS2010A	1" x .020" x 36' Roll	1

PTFE Coated Fiberglass Tape



Nonstick polytetrafluoroethylene (PTFE) tape is combined with the strength of fiberglass for a tape that is resistant to abrasion, high temperatures and chemicals. Ideal for mold protection, packaging, automotive and electronic applications. Temperature range is -100 degree Fahrenheit to +500 degree Fahrenheit. Nonconductive. Less than 5% elongation. Brown color. Sold in 1" wide by 18 yard rolls only.

Item No.	Tape Thickness		Adhesion (Oz./Inch)	Break Strength (Lbs./Inch)	Units @ Volts	Pack Qty.
	Backing	Total				
ZT-405	.003	.005	40	50	2,500	1

Note: Volts total

General Purpose Anti-Slip Tape



Laminated vinyl film with pressure sensitive adhesive back. Good tear strength. Light soft feel. Comfortable on bare feet and hands. Simply position, peel off backing paper, and apply to a clean, dry, oil free surface. 35000 series is surface compatible with painted wood, metal or sealed concrete. 41000 series is surface compatible with painted metal, sealed concrete, porcelain and fiberglass. Improves traction in both wet and dry applications. All rolls are 60 feet long and can be cut with scissors.

Item No.	Color	Thickness	Size	Pack Qty.
JT-35102	Black	.02 Roll	2" x 60'	60
JT-35106	Black	.02 Roll	6" x 60'	60
JT-35109	Black	.02 Cleat	6" x 2'	1
JT-35202	Gray	.02 Roll	2" x 60'	60
JT-35204	Gray	.02 Roll	4" x 60'	60
JT-35209	Gray	.02 Cleat	6" x 2'	1
JT-41002	Clear	.01 Roll	2" x 60'	60

Note: Thickness is with adhesive backing removed.

UHMW Polyethylene Tape



Translucent tape provides a nonstick, low friction surface, similar to PTFE tape, but with higher abrasion and puncture resistance. Ideal for chutes, packaging lines, slides or anywhere high-pressure sliding occurs. Also great sound dampening. Eliminates squeaks and rattles caused by adjacent parts movement. Ultra-high molecular weight (UHMW) polyethylene with an acrylic adhesive. Temperature range is -40 degree Fahrenheit to +225 degree Fahrenheit. FDA approved. Sold in 1" wide by 18 yard rolls only.

Item No.	Tape Thickness		Adhesion (Oz./Inch)	Break Strength (Lbs./Inch)	Percentage of Elongation	Pack Qty.
	Backing	Total				
ZT-505	.005	.007	50	40	400	1
ZT-510	.010	.012	50	120	300	1

**Tapes & Adhesives
3M™ Vinyl Tape 471/766**



Ideal for many color coding, abrasion protection, decoration, sealing, patching, splicing, wrapping and general purpose applications. Used in paint marking areas.

Item No.	Size	Type	Color	Pack Qty.
3M-03126	1/2" x 36 yds	471	Yellow	1
3M-03105	1/2" x 36 yds	471	Red	1
3M-06408	1/2" x 36 yds	471	Blue	1
3M-04310	2" x 36 yds	471	Yellow	1
3M-04304	2" x 36 yds	471	Red	1
3M-04308	2" x 36 yds	471	Blue	1
3M-43181	2" x 36 yds	766	Yellow/Black	1



Scotch® High Performance Masking Tape 232

3M



A high performance paper masking tape to be used in the medium temperature paint bake operation. A smooth crepe paper tape that is treated with a heat and solvent resistant coating.

Item No.	Size (W x L)	Pack Qty.
3M-02852	12 mm x 55 m	1
3M-02853	18 mm x 55 m	1
3M-02854	24 mm x 55 m	1
3M-02855	36 mm x 55 m	1
3M-04240	48 mm x 55 m	1

3M™ Paper Masking Tape 2214

3M



Economical, quality, general purpose paper tape with rubber adhesive. Exceptional shear to corrugated boxes and exceptionally consistent adhesion. Use for bundling, sealing, holding and non-critical indoor jobs. 5.3mil, pressure sensitive tape resists slivering. Use up to 150 degree Fahrenheit.

Item No.	Size (W x L)	Pack Qty.
3M-45587	12 mm x 55 m	1
3M-26074	18 mm x 55 m	1
3M-26077	48 mm x 55 m	1

Tartan™ Filament Tape 8934
Clear

3M



Clear polypropylene film backing reinforced with glass yarn filaments. High tensile strength, nick resistance, abrasion resistance and good handling for utility bundling, reinforcing, and pallet unitizing applications.

Item No.	Size (W x L)	Pack Qty.
3M-86519	18 mm x 55 m	1
3M-86521	48 mm x 55 m	1

3M™ H183 - Scotch® Box Sealing Tape Dispenser

3M



Lightweight, roll-on, pistol-grip dispenser for easy center seam closure of cases. Uses Scotch® box closure tapes up to 3 inches (72mm) wide on 3 inch cores. Built-in adjustable brake for a tight, consistent seal.

Item No.	Tape Size Inch	Pack Qty.
3M-61850	3	1

Scotch® Box Sealing Tape 371

3M



Industrial packaging tape used for box sealing, splicing, recoupage and other packaging applications.

Item No.	Size (W x L)	Pack Qty.
3M-15873	48 mm x 100 m	1
3M-19280	72 mm x 100 m	1

Scotch® Box Sealing Tape 375

3M



High performance box sealing tape. It's excellent strength, adhesion and handling characteristics, make it the best alternate for underpacked, overpacked, even re-used RSC's.

Item No.	Size (W x L)	Pack Qty.
3M-72406	48 mm x 50 m	1
3M-72407	72 mm x 50 m	1

3M™ H180 - Scotch® Box Sealing Tape Dispenser

3M



Portable, lightweight, easy-to-operate, hand-held tape dispenser. Accommodates up to a 60 yard (55 m) roll of tape, up to 2 inches (48 mm) wide. It features an adjustable tape brake allowing control of tension and delivery.

Item No.	Tape Size Inch	Pack Qty.
3M-19008	2	1



Scotch-Weld™ Cyanoacrylate Adhesives
Engineered Grade
Medium viscosity with some gap filling for plastics/rubbers

3M



- Formulated for high speed, high strength bonding of plastics and rubbers but will also bond other common substrates
- Recommended for use on close-fitting parts and fairly smooth, even surfaces

Item No.	Size	Color	Pack Qty.
3M-25241	2 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Engineered Grade
Very low viscosity wicking grade for plastics/rubbers

3M

Will Not Drip

- Gel formulation is suitable for bonding poorly mating components and for porous substrates
- Can be used on vertical surfaces as it will not drip or slump
- Recommended for use on assemblies with very close fitting parts and smooth, even surfaces

Item No.	Container Size	Color	Pack Qty.
3M-25207	1 oz Bottle	Clear	1
3M-25265	20 g Tube	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Engineered Grade
Low viscosity for close fitting plastic/rubber parts

3M

Exceptional Performance

- Exceptional performance on difficult to bond plastics and rubbers, together or in combination with metals and/or composites
- Superior performance on PVC, ABS, nylon, EPDM, santroprene, and viton

Item No.	Size	Color	Pack Qty.
3M-25204	1 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Metal
Low Viscosity to Penetrate Between Parts

3M



- Used for bonding smooth, even, close fitting parts
- Wicking type cyanoacrylate that can be used in preassembled parts

Item No.	Size	Color	Pack Qty.
3M-62736	1 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
General Purpose
Fast Curing

3M

*Fast Curing*

- Bonds a wide variety of substrates

Item No.	Size	Color	Pack Qty.
3M-62638	1 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Low Odor
Low-Medium Viscosity for Close Fitting Parts

3M

*General Purpose*

- Formulated for general purpose bonding of most plastics, rubbers and other common substrates
- Recommended for use on close-fitting parts and smooth, even surfaces. It will not attack many low density foams such as expand poly-styrene, allowing the use of Cyanoacrylate to bond these substrates

Item No.	Size	Color	Pack Qty.
3M-62732	1 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Low Odor
Very Low Viscosity Wicking Grade

3M

Low Odor

- Low volatility compared to Ethyl types which means that the white deposit known as blooming or chlorosis can be eliminated
- Its low odor can also improve worker comfort in work areas where ventilation is limited
- Suitable for the bonding of a very wide range of materials

Item No.	Size	Color	Pack Qty.
3M-62733	1 oz Bottle	Clear	1

Scotch-Weld™ Cyanoacrylate Adhesives
Super Fast Curing
Fast Cure, High Strength with EPDM and Other Elastomers

3M



- Specially formulated for bonding absorbent or porous surfaces such as paper, wood and leather. Also suitable for the rapid bonding of a wide range of plastics, metals and rubbers

Item No.	Size	Color	Pack Qty.
3M-62631	20 g Bottle	Clear	1



Scotch-Weld™ Anaerobic Adhesives Pipe Sealants Fast Curing Paste Sealant

3M



50ml Tube

250ml Tube

- High viscosity, fast curing paste
- Works in inactive surfaces such as stainless steel
- Withstands temperatures to 400° Fahrenheit (200° Celsius)
- Used for applications such as pressure vessels, air compressors, hydraulic, and pneumatic systems

Item No.	Size	Color	Pack Qty.
3M-62714	50 ml Tube	White	1
3M-62715	250 ml Tube	White	1

Scotch-Weld™ Anaerobic Adhesives Retaining Compound Pressure Fit

3M



50ml Bottle

250ml Bottle

- Medium viscosity, high strength retainer
- Resists temperatures of up to 400 degree Fahrenheit (200 degree Celsius)
- Retains rotors to shafts
- Retains bushing and sleeves
- Secures all types and sizes of bearings, shafts and cylindrical parts

Item No.	Size	Color	Pack Qty.
3M-25734	50 ml Bottle	Green	1
3M-25735	250 ml Bottle	Green	1

Retaining Compound

LOCTITE



- Bonds non-threaded, cylindrical metal assemblies
- Fills the inner voids of close fitting press fits, keyways, and splines
- Mount bearings and bushings, to make press fits even stronger

Item No.	Description	Size	Color	Pack Qty.
LOC-68035	680 High Strength	50 ml	Green	1
LOC-68060	680 High Strength	250 ml	Green	1
LOC-21449	638 Maximum Strength	250 ml	Green	1

3M™ Super 77™ Multipurpose Adhesive

3M



High tack, high coverage and fast drying for permanently attaching foils, carpeting, light-weight foams, paper, cardboard, felt, and cloth to painted or unpainted metals, wood and hardboard.

Item No.	Size	Pack Qty.
3M-21210	24 fluid oz	1

3M™ FoamFast 74 Spray Adhesive Orange

3M



For bonding flexible urethane or latex foam together or to many other materials like wood, metal, and non-vinyl plastics.

Item No.	Size	Pack Qty.
3M-82242	24 fluid oz	1

3M™ Hi-Strength 90 Spray Adhesive

3M



High strength, fast contact-type adhesive. Fast contact strength buildup for many decorative laminates. Only needs one minute of drying time.

Item No.	Size	Pack Qty.
3M-30023	24 fluid oz	1

RTV Silicone Adhesive and Sealant - Clear

CRC



For general-purpose sealing, bonding, protecting and waterproofing applications. Clear formulation forms a barely visible, water-tight seal.

Applications: Sealing, bonding, protection and waterproofing in HVAC, electrical, construction, metal working, for filling gaps between mating parts, gearboxes, pumps, motors and for general gasket sealing

Item No.	Description	Pack Qty.
CRC-14055	7.25 oz. Aerosol Can	1

Minute Mend™ Epoxy Putty

CRC



This two part epoxy permanently repairs scratches, gouges and holes. Bonds to wood, steel, fiberglass, glass, ceramics, plastics, concrete and aluminum. Also bonds to both wet and dry surfaces. It is ready to use in less than one minute.

Applications: Drums, tanks, castings, molds, sinks, tubs, gaskets, mounting terminal blocks, packing wires and repairing breaker boxes

Item No.	Description	Pack Qty.
CRC-14070	4 oz. Stick	1

**THREAD SEALANT****Lubricants & Sealants
Thread Sealant****LOCTITE®****PST Controlled Strength 565 Thread Sealant**

- General purpose instant sealant
- Controlled strength for ease of disassembly
- For use with threaded metal fittings
- Withstands temperatures up to 300 degree Fahrenheit

Item No.	Size	Color	Pack Qty.
565 Thread Sealant			
LOC-56531	50 ml	White	1

**Lubricants & Sealants
Liquid Threadlocker**

Lock and seal threaded fasteners. Available in various viscosities and strengths for both removable and permanent applications.

Item No.	Container	Color	Pack Qty.
Low Strength			
LOC-22231	50 ml Bottle	Purple	1
LOC-22241	250 ml Bottle	Purple	1
Removable			
LOC-24231	50 ml Bottle	Blue	1
LOC-24241	250 ml Bottle	Blue	1
Permanent			
LOC-26231	50 ml Bottle	Red	1
LOC-26241	250 ml Bottle	Red	1
High Strength - for fasteners up to 1"			
LOC-27131	50 ml Bottle	Red	1
LOC-27141	250 ml Bottle	Red	1
High Strength - for fasteners up to 1½"			
LOC-27731	50 ml Bottle	Red	1

**LOCTITE®****Lubricants & Sealants
Threadlocker Sticks**

- Convenient and portable
- Less waste and less mess
- Easy application
- Color-coded caps
- Solid formula for hard-to-reach areas

LOCTITE®**Lubricants & Sealants
PST 561 Pipe Sealant Stick****LOCTITE®**

Item No.	Size	Color	Pack Qty.
LOC-37127	19 gm	White	1

**Lubricants & Sealants
Anti-Seize Sticks****LOCTITE®**

Item No.	Description	Size	Color	Pack Qty.
LOC-37229	C5-A Copper	20 gm	Copper	1
LOC-37230	Silver Grade	20 gm	Silver	1



3M

Scotch-Weld™ Anaerobic Adhesives Threadlockers Permanent Studlock



50ml Bottle



250ml Bottle

- For use on bolts and studs up to 1" (25mm) in diameter
- Locks engine studs, cylinder block studs, water pump fasteners and refrigeration plants
- Prevents corrosion of assembled parts
- Prevents run off, dripping and migration after assembly
- Once applied, parts slip together easily, lubricated by the adhesive

Item No.	Size	Color	Pack Qty.
3M-62613	50 ml Bottle	Red	1
3M-62614	250 ml Bottle	Red	1

Scotch-Weld™ Anaerobic Adhesives Threadlockers High Temperature Studlock

- Resistant to temperature up to 450° Fahrenheit (230° Celsius)
- Gap filling formulation for larger diameter, coarse threaded parts
- Formulated to lock bolts and studs up to 1 in diameter
- Prevents dripping or migration of the liquid adhesive after assembly
- Uses include steel mill conveyor bolts, furnace mounting bolts

Item No.	Size	Color	Pack Qty.
3M-25137	50 ml Bottle	Red	1
3M-25135	250 ml Bottle	Red	1



50 ml Bottle



250 ml Bottle

Prevents
Dripping

3M

Scotch-Weld™ Anaerobic Adhesives Threadlockers Studlock



50ml Bottle



250ml Bottle

- High Strength for heavy duty items, vibration and stress load
- High torque strength
- Prevents corrosion
- Locks solid - will not dismantle
- Vibration resistant

Item No.	Size	Color	Pack Qty.
3M-62610	50 ml Bottle	Red	1
3M-62611	250 ml Bottle	Red	1

3M

Threadlocker

- Medium Strength, General Purpose
- Formulated to lock all metric and imperial nuts and bolts, preventing vibration loosening and leakage through the threads
- Removable with hand tools
- Prevents corrosion of assembled parts
- Prevents run off, dripping and migration after assembly. Once applied, parts slip together easily, lubricated by the adhesive
- Typical uses include coupling drive bolts, motor mounting bolts, construction equipment nuts, conveyor roller nuts

Item No.	Size	Color	Pack Qty.
3M-62605	10 ml Bottle	Blue	1
3M-62606	50 ml Bottle	Blue	1
3M-62607	250 ml Bottle	Blue	1



10ml Bottle



50ml Bottle



250ml Bottle

3M

Scotch-Weld™ Anaerobic Adhesives Threadlockers Oil Tolerant



50ml Bottle



250ml Bottle

- Medium Strength, General Purpose
- Formulated to lock all metric and imperial nuts and bolts, preventing vibration loosening and leakage through the threads
- Prevents run off, dripping and migration after assembly
- Prevents corrosion of assembled parts
- Typically used on mounting bolts, housing screws, etc.

Item No.	Size	Color	Pack Qty.
3M-25139	50 ml Bottle	Blue	1
3M-25140	250 ml Bottle	Blue	1

3M